


Type 2 Surge Arresters

- Plug-In Surge Arresters
- Disconnect facility for each individual module
- Visual end of life indication for each module
- Remote Indication auxiliary contact
- Mechanical keying of all slots

- IEC61643-1 / EN61643-11
- DIN rail mounting
- Temperature Range -40... +80°C
- IP20
- Replacement plug in modules are available

NHSPD4621T2

Total width 35.8mm

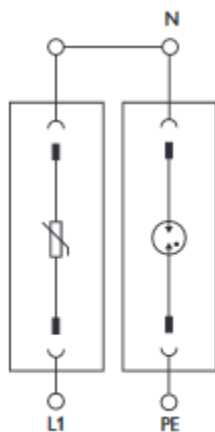

Connections found within Wylex consumer units.

NHSPD4621T2

Protective system	TN-S / TT / TN-C / IT	
Rated surge arrester voltage U_C	L-N / L-PEN 350 V a.c.	N-PE 260 V a.c.
Nominal voltage U_N	230 ... 240 V a.c. 50/60 Hz	
Nominal discharge current $I_N(8/20) \mu s$	20 kA	
Maximum discharge current $I_{max}(8/20) \mu s$	40 kA	
Protection level U_p	□ 1.4 kV	□ 1.5 kV
Maximum backup fuse	125 A gL	-
Short circuit resistance I_p with max. backup fuse	25 kA _{max}	-
Ø minimum L, N, PE	2.5mm ² (solid)	2.5mm ² (stranded)
Ø maximum L, N, PE	35mm ² (solid)	25mm ² (stranded)