MaxiCHARGER Gen2



Scan to view product and place in AR.

DATA SHEET

DC Compact 50kW

DC 50kW

SEVADIS
POWERING ELECTRIC VEHICLES


sevadis.com
0330 058 7144

Product Overview

Available without cable management

- Height: **1565mm**
- Width: **550mm**
- Depth: **265mm**



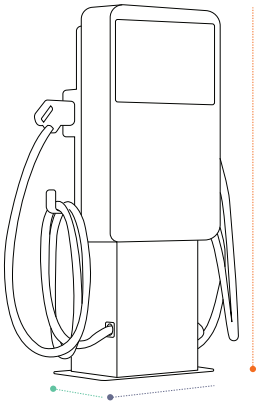


With cable management system

(CMS)The DC Compact supports the optional ASC435 cable management system, which adds the following external dimensions

- Height: **1850mm**
- Width: **780mm**
- Depth: **418mm**



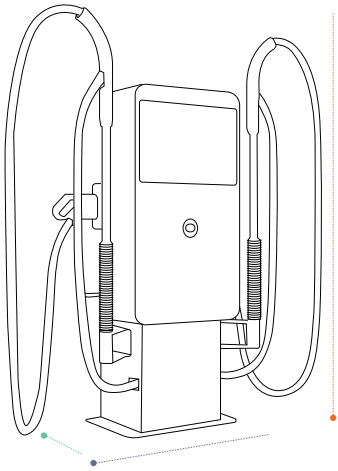

Product name	Product code	Power output	AC Input voltage	Dimensions HxWxD
MaxiCharger DC Compact 50kW	EVMW40S	50kW	Three phase 400V AC±10%	1565 x 220 x 265 mm
Optional Cable Management System	EVDCCCMS	50kW	Three phase 400V AC±10%	1850 x 780 x 418 mm

Technical Data

	EVMW40S
Charging mode	Mode 4 CCS2
Output voltage	150-950V
Max output current	133A
Number of outputs	2*CCS2
Peak efficiency	≥96%
Earthing system	3P, N, PE
User interface	21.5 inch LCD touch screen Autel Charge app, Autel Charge cloud, 4G, Wi-Fi, Ethernet
Communication protocols	OCPP 1.6J (OCPP 2.0.1 optional)
User authentification	App, RFID card
IP & IK rating	IP54, IK10
Unit dimensions	1000 x 550 × 265 mm (H x W x D)
Operating temperature range	-30°C ~ +50°C
Safety standards	IEC 61851-1, IEC 61851-23, IEC 61851-21-2, ISO 15118
Certification	CE, EMC Class A, UKCA
Warranty	2 years

With cable management
management system



SEVADIS
POWERING ELECTRIC VEHICLES

0330 058 7144
enquiries@sevadis.com

sevadis.com

Granville House, Unit E, The Heights Business Park,
Ibstone Rd, Stokenchurch High Wycombe, HP14 3BG

MaxiCHARGER Gen2